

The Royer Model 513H Trommel screen is designed for maximum productivity with minimum downtime. This unit sets up in minutes and is fully transportable without a permit. The exclusive Royer design features make the 513H a must for any medium to high volume producer of topsoil, mulch, compost, and aggregate.


Each 513H comes equipped standard with the Following;

- Variable speed control on all belts and drum
- Drum overload protection
- Remote Control
- Four adjustable hydraulic stabilizing legs
- Air brakes and over-the-road light kit
- Removable hopper extension

Optional Features

- Overs Stacking Conveyor
- Additional Brushes
- Screen Cable Wrap
- Hydraulic Tipping Grizzly

Available New

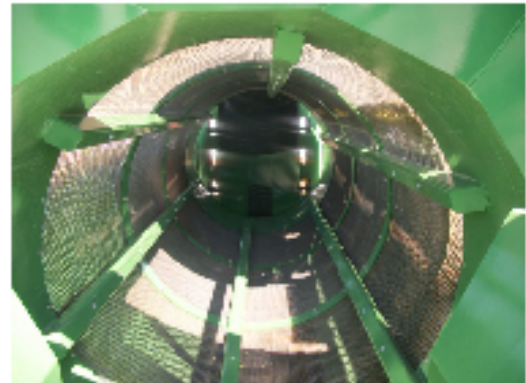

Dimensions & Specifications

175cu. yd. / hr. Max Input Processing

Up to 18'6" Material Stacking Height

230 cu. yd. / hr. Stock Pile Capacity

3.5 cu. yd. Hopper Capacity

2-3 cu. Yd. Recommended Loader

5' x 13'3" Drum Size

66' Operating Length (with Overs Conveyor)

9'4" Loading Height

35,000 Weight (with Overs Conveyor)

Kubota Diesel Power Plant

90 Horsepower

75 gal Fuel Tank Size

ROYER INDUSTRIES, INC.TM

8856 Howlett Road
PO Box 3001
Oshkosh, WI 54902

Corporate Office (920) 888-2999
Parts & Service (888) ROYER02
Facsimile (920) 888-3087

www.royerind.com
royer@royerind.com

Copyright © 2014, Royer Industries, Inc.